

# FLOORING SURFACES WOODSTEP COLLECTION

For Architects,  
Specifiers and  
General Contractors

## Special Features

- Heavy duty
- It really looks and feels like wood without the high maintenance expense
- Excellent for commercial and home use
- Life expectancy: up to 18 years
- Guarantee: 7 years against wear

Slightly textured, heavy duty surface. Exceptionally realistic wood design combines form and function. Resists wear and tear. Woodstep is used in conjunction with floating wood subfloor. Woodstep Plus and Woodstep Ultra can be installed directly over slab.

### ACTIVITY

Recommended for virtually all aerobic activity including jazzercise, martial arts and step.


### INSTALLATION

Woodstep can be installed directly on a floating wood subfloor or hardwood surface, temporarily, semi-permanently or permanently. Woodstep Plus/Woodstep Ultra can be installed over existing smooth concrete slab using double-faced tape, adhesive or Re-Use-It. (Slab should be sealed against moisture.)


### MAINTENANCE

These acid and food stain resistant flooring systems need to be cleaned with a detergent/degreaser (Proclean) once a week.


#### WOODSTEP

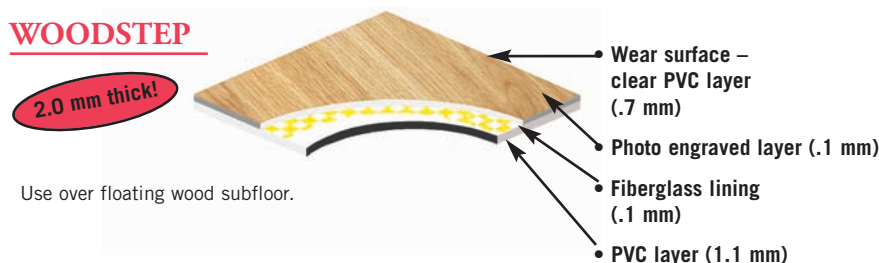

#### WOODSTEP PLUS

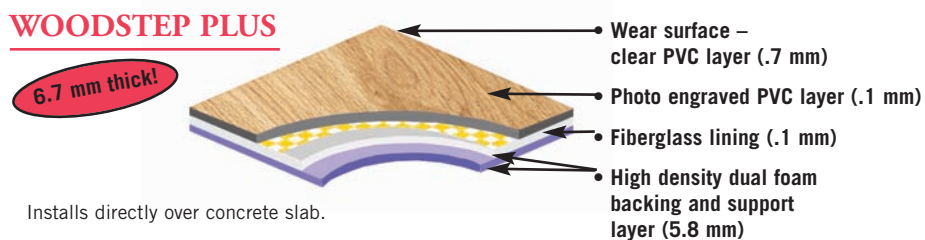

#### WOODSTEP ULTRA

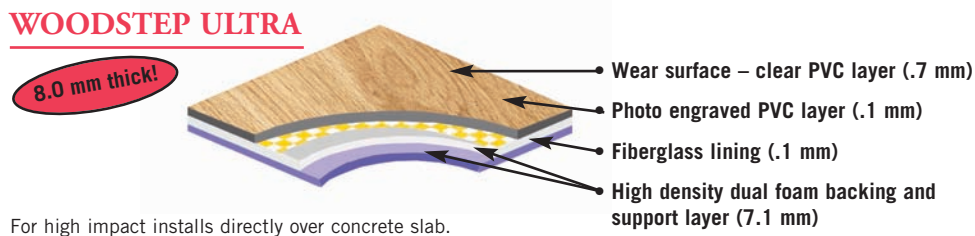

See reverse side for flooring specifications and MSDS Ratings.

# FLOORING SURFACES

# WOODSTEP COLLECTION

## TYPE

Woodstep: Hardwearing, heterogenous contract floorcovering.

Woodstep Plus/Woodstep Ultra: Hardwearing, heterogenous, cushion backed, contract floorcovering.

## COLORS

See cross sections on reverse side.  
Woodstep: Oak in stock.  
Custom color available.

Woodstep Plus/Woodstep Ultra:  
Available in Maple only

## THICKNESS

Woodstep: .080"  
2.0mm

Woodstep Plus: .264"  
6.7mm

Woodstep Ultra: .315"  
8mm

## WIDTH & LENGTH

Woodstep:  
6.56' x 65' = 426.4 ft<sup>2</sup>  
2 lm x 20 lm = 40 lm<sup>2</sup>

Woodstep Plus:  
6.56' x 60' = 393.6 ft<sup>2</sup>  
2 lm x 18.5 lm = 37 lm<sup>2</sup>

Woodstep Ultra:  
6.56' x 60' = 393.6 ft<sup>2</sup>  
2 lm x 18.5 lm = 37 lm<sup>2</sup>

## WEIGHT

Woodstep:  
6.5 lbs. per sq. yd.  
3.53 kg per sq. meter

Woodstep Plus:  
7.7 lbs. per sq. yd.  
4.18 kg per sq. meter

Woodstep Ultra:  
8.5 lbs. per sq. yd.

## QUALITY STANDARDS

Woodstep Collection is manufactured to meet all the performance requirements of the listed standards:

Europe: EN 649: 1996

USA: ASTM F1913; F1700

Australia: AS2055.1(sheet)

Canada: CSA A126.6

Agrément: G5ws

Use area classification: EN 685: 23/34/43

## FIRE RATINGS

ASTM E648-97 E662 C1D28 89

NFPA 253 E662

NFPA 372 258

## SLIP RESISTANCE

Class D (dry conditions)  
>.60/ASTM D2047 and ADA

## DIMENSIONAL STABILITY

Casters OK

Sound Reduction 59 dbs

## NOTES

For information regarding handling and installation, adhesives, maintenance, applications and chemical resistance, consult Aeson.

Information on this specification sheet supercedes all materials published prior to April 2011.

### *Woodstep Collection Stock Colors Available Available for immediate shipment*

